


## HF Splitter-Combiner

**Designed for combining RF Power Amplifiers in the HF Frequency range.**

- 1.5 MHz – 30.0 MHz
- 50 Ohm ports
- 2 X 600 Watt P.E.P. in
- 1.2 KWatt P.E.P. out
- isolation >30 db
- insertion loss 0.3 db

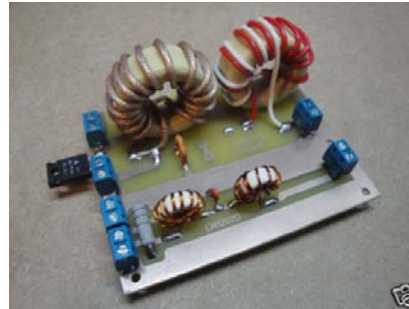

Dim. : 100 mm X 80 mm X 42 mm LxWxH

### ELECTRICAL SPECIFICATIONS

Characteristics	Min	Typ.	Max	Unit
Frequency	1.5		30.0	MHz
Output Power Combiner			1.2	KWatt PEP
Input Power Combiner			600 X 2	KWatt PEP
Input Power Splitter			50.0	Watt PEP

### NOTE:

- 1) The CH1202 board must be mounting on aluminium or other metallic material
- 2) All holes must used for mounting using metallic screws
- 3) All holes are GND point's

## IMPORTANT NOTICE

RF Source RESERVE THE RIGHT TO MAKE CHANGES TO THE PRODUCT(S) OR INFORMATION CONTAINED HEREIN WITHOUT NOTICE. RF Source ASSUMES NO RESPONSIBILITY FOR ANY ERRORS WHICH MAY APPEAR IN THIS DOCUMENT.

WARRANTY INFORMATION APPLICABLE TO THE PRODUCT IDENTIFIED HEREIN IS AVAILABLE UPON REQUEST. NOTHING CONTAINED HEREIN SHALL CONSTITUTE A WARRANTY, REPRESENTATION OR GUARANTEE OF ANY KIND. RF Source EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND/OR IMPLIED INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, AND OF FITNESS FOR A PARTICULAR PURPOSE, USE OR APPLICATION.

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of RF Source.

## WARNING

RF Source PRODUCTS ARE NOT INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS. USE OF A RF Source PRODUCT IN ANY SUCH APPLICATION WITHOUT WRITTEN CONSENT IS PROHIBITED.